



Window Handle Installation

202220598-0615

1. Install spring into bottom of handle. (Spring is pre-installed in some models).

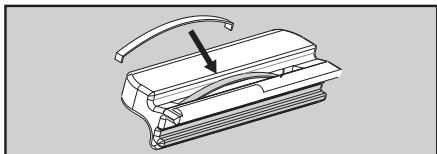

2. Open top window to a comfortable height. Slide handle (with the spring installed and facing down) into top rail channel starting at the top left side of the operating glass. The spring may need to be compressed slightly to allow the handle to slide into the channel.



3. Center handle on window rail by sliding it past the first left notch. There will be some resistance. THEN STOP! The handle should not go past the second right notch. When handle installation is complete, the left notch will be visible and the right notch will be hidden behind the handle.

