



Handle Installation Instructions

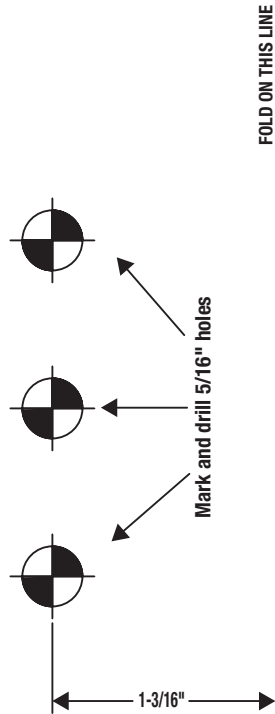

Fold along gray lines and place around edge of door

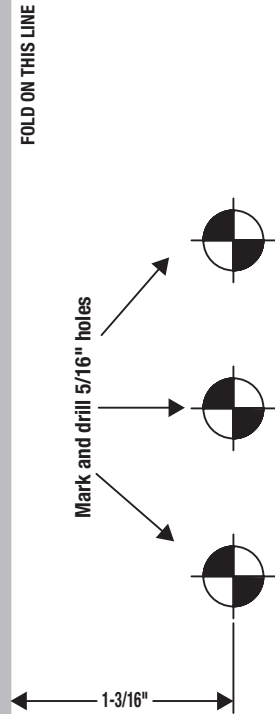

DRILLING INSTRUCTIONS

1. Cut along dotted line to separate template.
2. Tape template around edge of door at desired height (Fig 1). **Caution: Raise or lower template so that inside latch will not hit entrance handle or lock.**
3. Mark position of the six holes with center punch. Pre-drill each hole with 1/8" bit.
4. Using 5/16" drill bit, bore the three holes from each side of door. Remove template.

LATCH INSTALLATION INSTRUCTIONS

1. If not pre-assembled, insert handle into handle housing (Fig 2).
2. Place spring onto spindle, as shown, and insert into handle assembly (Fig 3).
3. Push this assembly through drilled holes from the outside of door (Fig 4). Then position inside latch onto spindle on inside of door. Secure firmly with #6-32 x 1-3/4" machine screws. **Caution: Do not overtighten screws as this may cause handle to bind.**
4. Position strike on entry door so that it engages inside latch. Attach using two #6 x 1-1/4" screws. If needed, use enclosed shims to extend strike.

