


Storm Door Retainer Installation and Removal

INSTALLATION: Start one end of the retainer into the track at the top or bottom of the window and push retainer into the track as shown. Continue to snap retainer into place from the end (moving toward the opposite end in increments of four to five inches). You will hear a snap once the last portion of the retainer is in the track. Refer to illustrations below.

REMOVAL: Place large, flat-nose screwdriver blade in groove next to door frame, approximately 1/2" from top or bottom of window. Tilt screwdriver at slight angle, tipping handle toward door frame. Tap end of screwdriver, popping out end of retainer. Grasp retainer and pull to remove.

NOTE: The shape of the replacement retainer may look different due to continuous design improvements. If needed, cut the retainer strip to match the original length.

INSTALLATION

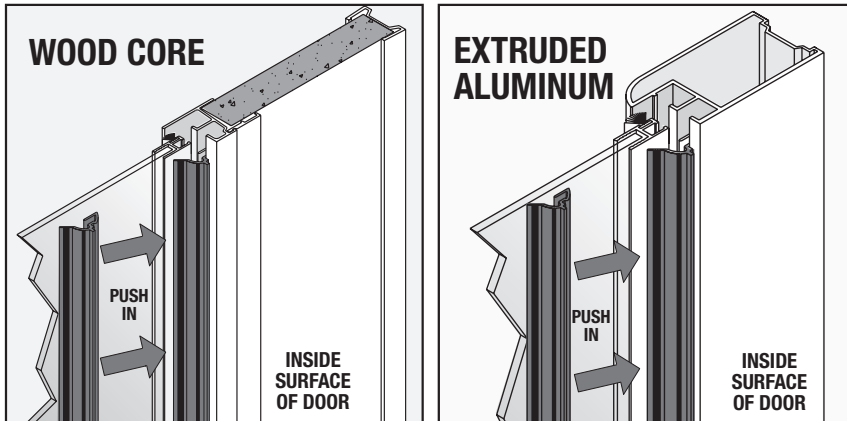

REMOVAL

